

**TIMSPEC
AUCKLAND**

64c Stoddard Road,
Mt Roskill, Auckland 1041
T : 09 620 0260
F: 09 620 0261
Email: sales@timspec.co.nz

**TIMSPEC
CARTERTON**

30 Kent Street
Carterton 5713
T: 06 379 5428
F: 06 379 9382
Email: sales@timspec.co.nz

**TIMSPEC
CHRISTCHURCH**

9B Francella Place
Bromley, Christchurch, 8062
T: 03 384 5287
F: 03 384 5289
Email: gareth@timspec.co.nz

TIMSPEC
Timber Specialists



www.timspec.co.nz

HARDWOOD DECKING

Sizes and Profiles Available

We stock Kwila and Vitex in a wide range of sizes, if we don't have it dressed in stock we can usually machine it within 10-14 working days. **Other species such as Saligna and Pilularis are available similarly.**

Have you heard about Accoya® wood? An innovative new product that is guaranteed not to rot for 50 years (above ground) and is super-stable, just perfect for decking. Phone our sales team for more information.

Size:	42x19	65x19	90x19	140x19	42x32	65x32	90x32	140x32	42x42	65x42	90x42	140x42
KWILA	ex stock	ex stock	ex stock	ex stock	ex stock	ex stock	ex stock	ex stock	ex stock	ex stock	ex stock	ex stock
VITEX	Machined to order	Machined to order	ex stock	ex stock	Machined to order	Machined to order	Machined to order	ex stock	Machined to order	Machined to order	Machined to order	Machined to order
ACCOYA	Machined to order	Machined to order	Machined to order	ex stock	Machined to order	Machined to order	Machined to order	Machined to order	Machined to order	Machined to order	Machined to order	Machined to order
SALIGNA	ex stock	Machined to order	ex stock	Machined to order	Machined to order	ex stock	Machined to order	Machined to order	Machined to order	ex stock	Machined to order	Machined to order

ABOUT THE TIMBERS

	KWILA	VITEX	ACCOYA
Origin:	Indonesia	Solomon Islands	New Zealand
Botanical Name:	Intsia spp	Vitex cofassus	Pinus Radiata
Durability (Heartwood): (Above Ground)	Durable	Durable	Very Durable
Density (Air Dried):	850 kg/m ³	700 kg/m ³	500 kg/m ³
Hardness (Janka):	8.6 kN	5.6 kN	
Stability:	Very Stable	Stable	Very Stable
Movement in Use	1.5 - 3.0%	2.0 - 4.0%	0.8 - 1.5%
Length Range:	1.8 - 5.4m	1.5 - 3.6m	1.8 - 4.8m
Average Length:	3.3m	2.4m	3m



KWILA

Kwila is the most well-known hardwood decking timber in use in New Zealand. It is a pale brown to dark reddish-brown coloured hardwood that comes in a nice length spread and is quite stable.

Its only downside is water-soluble tannins that leech from the timber with exposure to water, a process called bleeding. This resin will stain so be careful with tiles and concrete work.

All Kwila is sourced as being VLC (i.e. Verified Legal Compliance) which is on Stage 2 toward being FSC certified. (See <http://www.rainforest-alliance.org/forestry/certification/services/smart-step>).



Chris Wiffen (left) and Rex Holmes, joint managing directors at Timspec, by the boardwalk made with Accoya timber at La Rosa Reserve in Green Bay.

ACCOYA

Accoya is a modified timber. Modified by means of Acetylation, rendering the timber more durable and more stable than almost all other timbers. The timber comes from NZ but is modified in Holland.

The product is FSC certified.

The Accoya is not as hard as Kwila or Vitex, and is more brittle, but does not bleed, and is stable enough to use as a 190x20 board.



VITEX

Vitex is a creamy-grey coloured, durable timber from the Solomon Islands that bleeds less than Kwila.

Trees are felled and milled by local communities and villagers, usually with portable mills. This approach massively reduces the impact to the forest and more money is returned to the local community.

The only disadvantage of this method is that it results in a shorter length spread.

**TIMSPEC
AUCKLAND**

64c Stoddard Road,
Mt Roskill, Auckland 1041
T: 09 620 0260
F: 09 620 0261
Email: sales@timspec.co.nz

**TIMSPEC
CARTERTON**

30 Kent Street
Carterton 5713
T: 06 379 5428
F: 06 379 9382
Email: sales@timspec.co.nz

**TIMSPEC
CHRISTCHURCH**

9B Francella Place
Bromley, Christchurch, 8062
T: 03 384 5287
F: 03 384 5289
Email: gareth@timspec.co.nz

TIMSPEC
Timber Specialists

www.timspec.co.nz

HARDWOOD DECKING

Installation

Before undertaking any construction work you must consult with your local authority to check that any construction requirements are met and to determine if a Building Consent is required. A qualified tradesman should be consulted where expert services may be required.

Planning

Joist Spacing: Joists should be at maximum 450mm between centres, but can be extended by using larger cross sections (140 x 25mm, 140 x 32mm, etc), an engineer should be consulted for specifications.

Preparation

Defects: Some boards may contain defects that will require docking out.

Length Sorting: Sort the timber lengths to optimise usage.

Coating: Although not very common in New Zealand, coating your deck will extend its life. We recommend a minimum of one coat of a suitable exterior timber decking coating or oil be applied to all four sides plus cut ends of the decking prior to installation.

Fastenings

90 x 19mm Decking: Fix the decking to every supporting joist with two 65 x 2.8mm Stainless Steel Annular Grooved Decking Nails.

140 x 19mm and 24/25mm Thick Decking: Fix the decking to every supporting joist with two 10g x 65mm Stainless Steel Decking Screws. Fixing 32mm thick decking requires 75mm screws.

Fixing

Pilot Holes: Predrill pilot holes slightly smaller than the nail or screw gauge before fixing.

Location: Fixings should be located 15mm in from the edge of the board for 19mm Decking or 20mm in from the edge of the board for 24/25mm Decking.

Stagger Fixings: Staggering the fastenings across the joists will help prevent splitting.

Expansion Gaps: Leave an approx 3 - 6mm gap between boards (will vary depending on timber species, width of board, and moisture content) to allow for timber movement, see the table below for more information.

Joins

Placement: Joins must be placed over a joist.

Method: Decking should be cut square and butted together. Planning an angled 2-3mm chamfer off the end of each board will mask any unevenness in height.

Fixings Location: Fixings should be 20mm in from the butted joint and angled toward the centre of the joist to maximise holding performance.

Maintenance

Cleaning: Annually cleaning your deck will help prolong its life, a light detergent that contains an anti-fungal agent is best.

Recoating: Any coating or oil applied may require another coat each year.

Winter: Removing any items that will trap water underneath them (furniture, pot plants, etc) for the duration of winter will extend the life of your deck and help keep it looking great.

Expansion Gaps

Expansion Gaps are essential for many reasons, the two most paramount are: to provide ventilation to the decking and; to overcome the timbers natural tendency to shrink and swell according to the amount of moisture in the immediate environment. Three factors need to be considered in determining the gap between boards:

- **Moisture Content:** Decking can be supplied in a range of moisture contents, from near green to kiln dried. A kiln dried product will **swell**, whereas a green or air dried board will **shrink**, in either case please see below for recommended expansion gaps.
- **Species:** Kwila is a very stable species which does not shrink and swell a lot, however other species like Jarrah, Saligna, Massa, Greenheart, and others all shrink and swell a lot.
- **Size (width of board):** Wider boards will shrink/swell more than narrower boards so require a larger expansion gap.

Recommended Expansion Gaps for Hardwood Decking

Timber species	90mm wide		140mm wide	
	Green/Shipping Dry	Air Dried/Kiln Dried	Green/Shipping Dry	Air Dried/Kiln Dried
KWILA	3mm	4mm	Do not use	6mm
VITEX	3mm	4mm	Do not use	6mm
JARRAH	Do not use	5mm	Do not use	8-10mm (not recommended)
SALIGNA	Do not use	5mm	Do not use	8-10mm (not recommended)

Check with BRANZ on 0800 80 80 85 or via their web site at www.branz.co.nz for the latest installation information.

**TIMSPEC
AUCKLAND**

64c Stoddard Road,
Mt Roskill, Auckland 1041
T : 09 620 0260
F: 09 620 0261
Email: sales@timspec.co.nz

**TIMSPEC
CARTERTON**

30 Kent Street
Carterton 5713
T: 06 379 5428
F: 06 379 9382
Email: sales@timspec.co.nz

**TIMSPEC
CHRISTCHURCH**

9B Francella Place
Bromley, Christchurch, 8062
T: 03 384 5287
F: 03 384 5289
Email: gareth@timspec.co.nz


TIMSPEC
Timber Specialists




www.timspec.co.nz

DECKING PROFILES

'Smooth' Decking

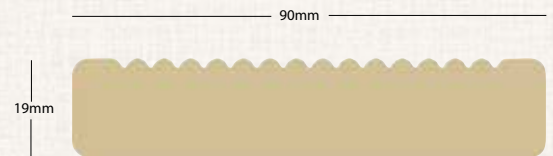


90 x 19mm Griptread (R1F) Decking

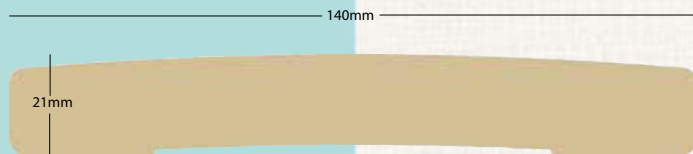

140 x 21mm 'Watershed' Decking



120 x 32mm 'Tim-Deck' Decking

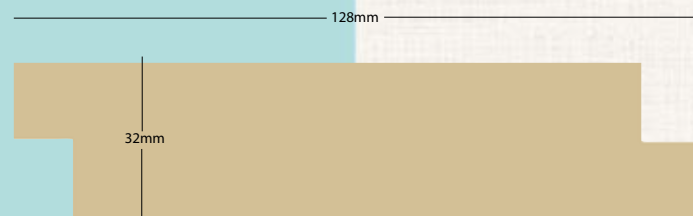

140 x 32mm 'Shiplap' Truck Decking

**TIMSPEC
AUCKLAND**

64c Stoddard Road,
Mt Roskill, Auckland 1041
T : 09 620 0260
F: 09 620 0261
Email: sales@timspec.co.nz

**TIMSPEC
CARTERTON**

30 Kent Street
Carterton 5713
T: 06 379 5428
F: 06 379 9382
Email: sales@timspec.co.nz

**TIMSPEC
CHRISTCHURCH**

9B Francella Place
Bromley, Christchurch, 8062
T: 03 384 5287
F: 03 384 5289
Email: gareth@timspec.co.nz

TIMSPEC

Timber Specialists



www.timspec.co.nz



Above:
Accoya 195mm x 20mm decking




Above: Alfresco Landscapes (140mm x 19mm VITEX decking)



Above: Alfresco Landscapes (140mm x 19mm Kwila decking)



Above: VITEX 140mm x 20mm decking



Accoya decking



Left & below:
Street Furniture Saligna bench seats (5+ years old)

